

BDE Minimum Settings (2/20/2017)

For all Windows (XP, 7, 8, 10) machines use BDEInfoSetup.EXE

For XP and Windows 32 bit machines, go to Control Panel or Program Files.

For Windows 64 machines, got to Program Files (86), Borland, Common Files, BDE, and execute BDEADMIN.EXE.

Possibly for Windows 10, also look BDE under Program Files (86), Common Files, Borland, BDE

For Windows 10 Machines ONLY

In addition to setting the BDE, you will also need run the ...\\Projectw\\DLL**Prefer External Manifest Win 10.reg** Registry Update. This Registry Update allows users to use elevated Screen Sizing 150% or 200% and Project Screen will continue to look good instead of being distorted.

For all Windows Machines

- 1) Add the parameter WINDIR=%USERPROFILE% or /WINDIR=%USERPROFILE% to the short cut to change the (use the "/" flag with this parameter if you are using it with other parameters.)
- 2) On an information point of view, I have seen that after a Windows Update on Windows 10 machines, the security on the machine to remove access to c:\\windows\\temp so that if you are using a TEMPPATH=C:\\Windows\\Temp, you will on occasion need re-touch the c:\\windows\\temp path with windows explorer to gain access to hat path.


If you User Account Control turned ON, on the machine, you should right click on BDEADMIN.EXE and "Run as Administrator"

If you are running Project 6.x For Windows 10, DO NOT Run as Administrator


If you are running Project 7.x For Windows 10, Run as Administrator

Then select the Configuration Tab, then select Drivers, Native, and Paradox.

For Paradox, the Level it has to be "4". "C:\\\" is also ok for NET DIR.

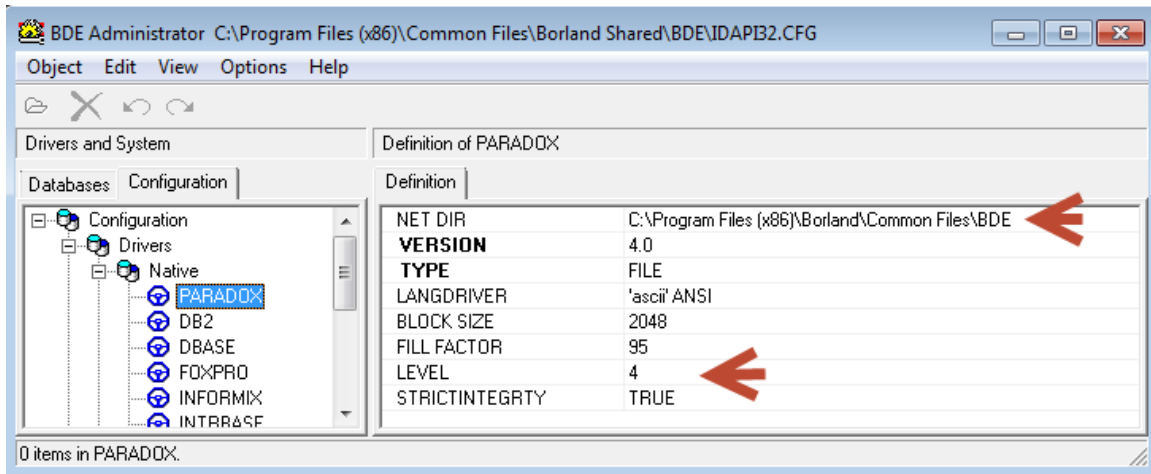

For DBASE, the Level it has to be "5".

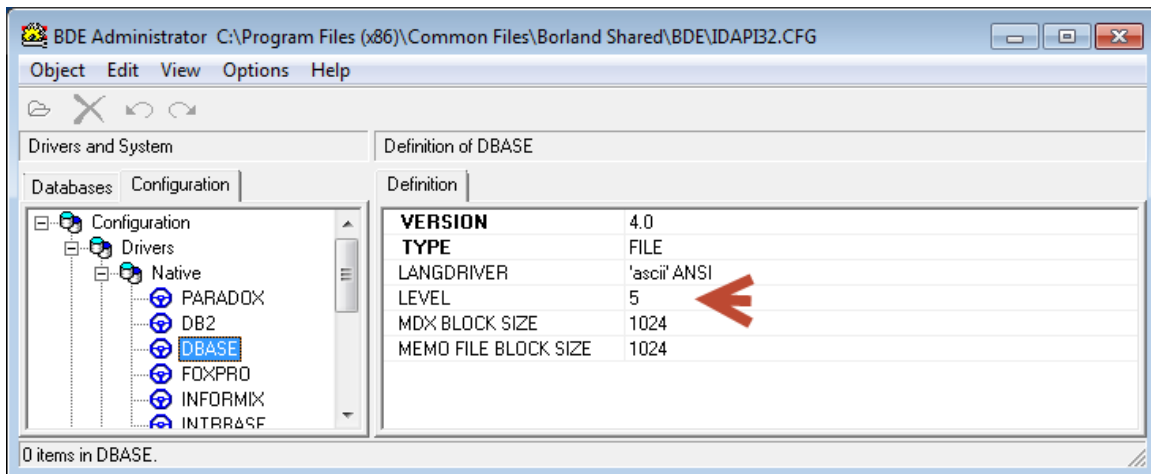

Next press the System and the far left bottom, and press (INIT)

For Vista and Windows 7/8/10

Set Shared Memory Location = **"5BDE" or "0x6BDE"?**

For XP Machines the Shared Memory Location = **"7000"**

BDE Administrator C:\Program Files (x86)\Common Files\Borland Shared\BDE\IDAPI.CFO

Object Edit View Options Help

Drivers and System

Databases Configuration

Configuration

- Drivers
 - Native
 - PARADOX
 - DB2
 - DBASE
 - FOXPRO
 - INFORMIX
 - INTRBASE
 - MSACCESS
 - MSSQL
 - ORACLE
 - SYBASE
 - ODBC
- System
 - INIT
 - Formats

Definition of INIT

Definition

AUTO ODBC	FALSE
DATA REPOSITORY	
DEFAULT DRIVER	PARADOX
LANGDRIVER	'ascii' ANSI
LOCAL SHARE	TRUE
LOW MEMORY USAGE LIMIT	32
MAXBUFSIZE	4096
MAXFILEHANDLES	100
MEMSIZE	16
MINBUFSIZE	128
MTS POOLING	FALSE
SHAREDMEMLOCATION	5bde
SHAREDMEMSIZE	4096
SQLQRYMODE	
SYSFLAGS	0
VERSION	4.0

Win 7/8/10 = 5BDE
XP = 7000

0 items in INIT.